


Performance specifications		
Nominal Pressure	(2.5MPa)	Test Medium
Shell Strength	(3.8MPa)	Water
Suitable Temp	-29~425℃	
Media	Water/Steam/Oil	

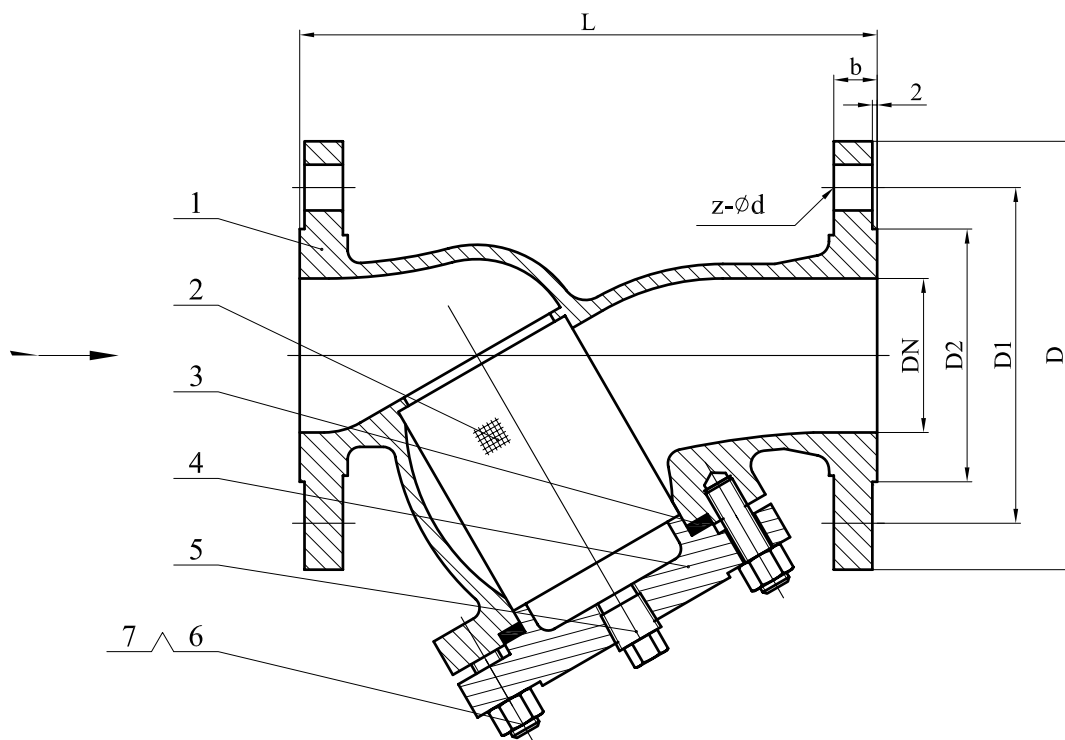

- Technique request
1. Design: ASME B16.34
 2. Shell material: ASTM A216 WCB
 3. Face-to-face dimension: DIN3201-F1
 4. Connecting flange (RF): EN1092-1:2001
 5. Pressure Test: API598

PN	DN	L	D	D1	D2	b	z-φd
2.5MPa	50	230	φ 165	φ 125	φ 102	20	4- φ 18
	65	290	φ 185	φ 145	φ 122	22	8- φ 18
	80	310	φ 200	φ 160	φ 138	24	8- φ 18
	100	350	φ 235	φ 190	φ 162	24	8- φ 22
	125	400	φ 270	φ 220	φ 188	28	8- φ 26
	150	480	φ 300	φ 250	φ 218	28	8- φ 26
	200	600	φ 360	φ 310	φ 278	30	12- φ 26
	250	730	φ 425	φ 370	φ 335	32	12- φ 30
	300	850	φ 485	φ 430	φ 395	34	16- φ 30
	350	980	φ 555	φ 490	φ 450	38	16- φ 33
	400	1100	φ 620	φ 550	φ 505	40	16- φ 36

07	Cover Nut	A194 2H
06	Cover Bolt	A193 B7
05	Sewage bolts	A105
04	Bonnet	A216 WCB
03	Gasket	304+Graphite
02	Strainer	SS304
01	Body	A216 WCB
No:	Part Name	Material(WCB)
Client:		
Contract:		
DN:50~400(mm)		Y-Type strainer
Quantity:		Designer:Mr. Xia
Weight:		Check by:
		Date:Jan-10th-2013
		Drawing:20130110001