


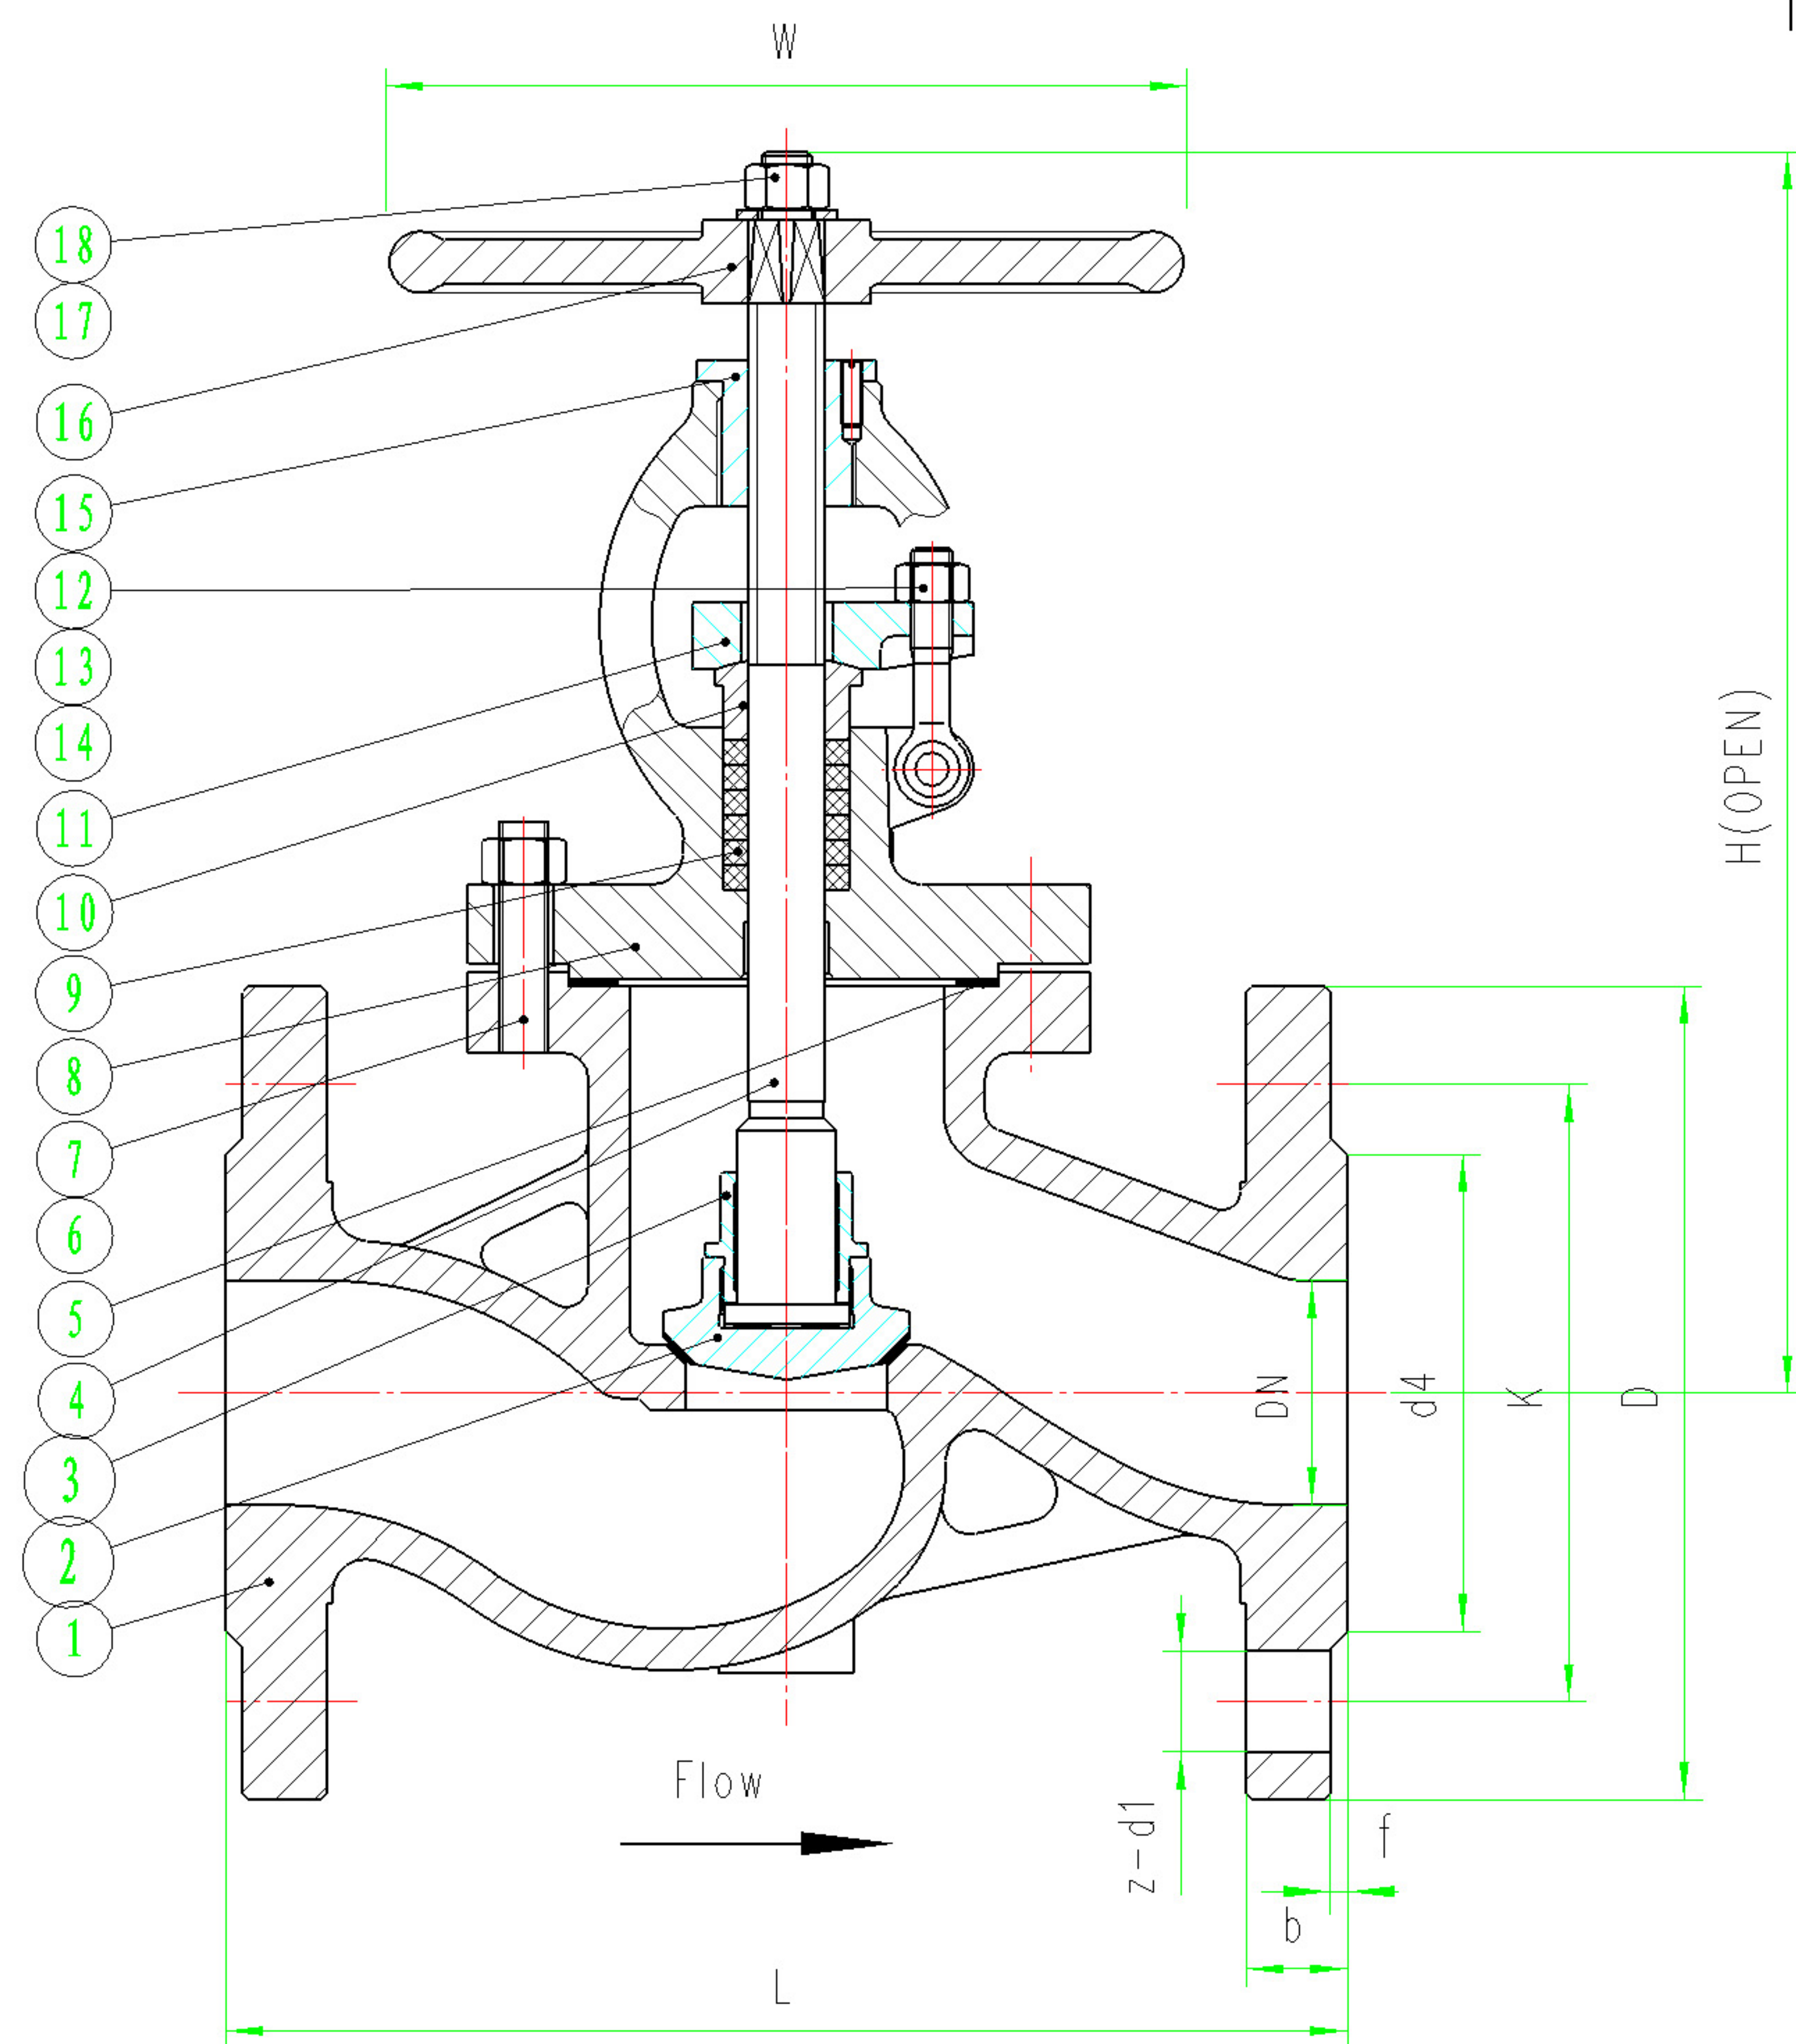

DN	General Dimensions			Flange Dimensions						W't(kg)	Q'ty
mm	L	H	W	D	k	d4	b	f	z-d1		
10	130	180	100	90	60	40	14	2	4- ϕ 14	3.5	15
15	130	255	140	95	65	45	14	2	4- ϕ 14	5	15
20	150	275	140	105	75	58	16	2	4- ϕ 14	7	15
25	160	295	160	115	85	68	16	2	4- ϕ 14	9	15
32	180	327	160	140	100	78	16	2	4- ϕ 18	12	10
40	200	380	180	150	110	88	16	3	4- ϕ 18	16	10
50	230	398	240	165	125	102	18	3	4- ϕ 18	23	10
65	290	433	280	185	145	122	18	3	8- ϕ 18	32	10
80	310	468	320	200	160	138	20	3	8- ϕ 18	43	10
100	350	520	360	235	190	162	20	3	8- ϕ 22	60	10
125	400	520	360	270	220	188	22	3	8- ϕ 26	82	10
150	480	674	400	300	250	218	22	3	8- ϕ 26	98	10

MAIN PARAMETER SPECIFICATION

1. Design and manufacture :DIN3356.
2. Face to face :DIN3202 F1.
3. End Flange Dimensions :DIN 2501
4. Pressure-Temp Rating :ASME B16.34
5. Pressure test :API 598.

18	H. W. Lock Nut	AISI 1035
17	Washer	Alloy Steel
16	Hand Wheel	Carbon Steel
15	Stem Nut	ZCuAl10Fe3
14	Gland Nut	A194 2H
13	Gland Eye-Bolt	A193 B7
12	Pin	AISI 1045
11	Gland Flange	A216 WCB
10	Gland	A182 F6
9	Stem Packing	Graphite
8	Bonnet	A216 WCB
7	Bonnet Nut	A194 2H
6	Bonnet Bolt	A193 B7
5	Gasket	SS304+Graphite
4	Stem	A182 F6
3	Disc Nut	A182 F6
2	Disc	A105+13Cr
1	Body	A216 WCB+13Cr
NO	PART NAME	MATERIAL

GLOBE VALVES

DN 10~200

PN25 RF

DESIGN BY			F H V
CHECKED BY			
STANDARD BY			ASSEMBLING DRAWING
APPROVED BY			
DRAWING No.:	REV.:	DATE	