


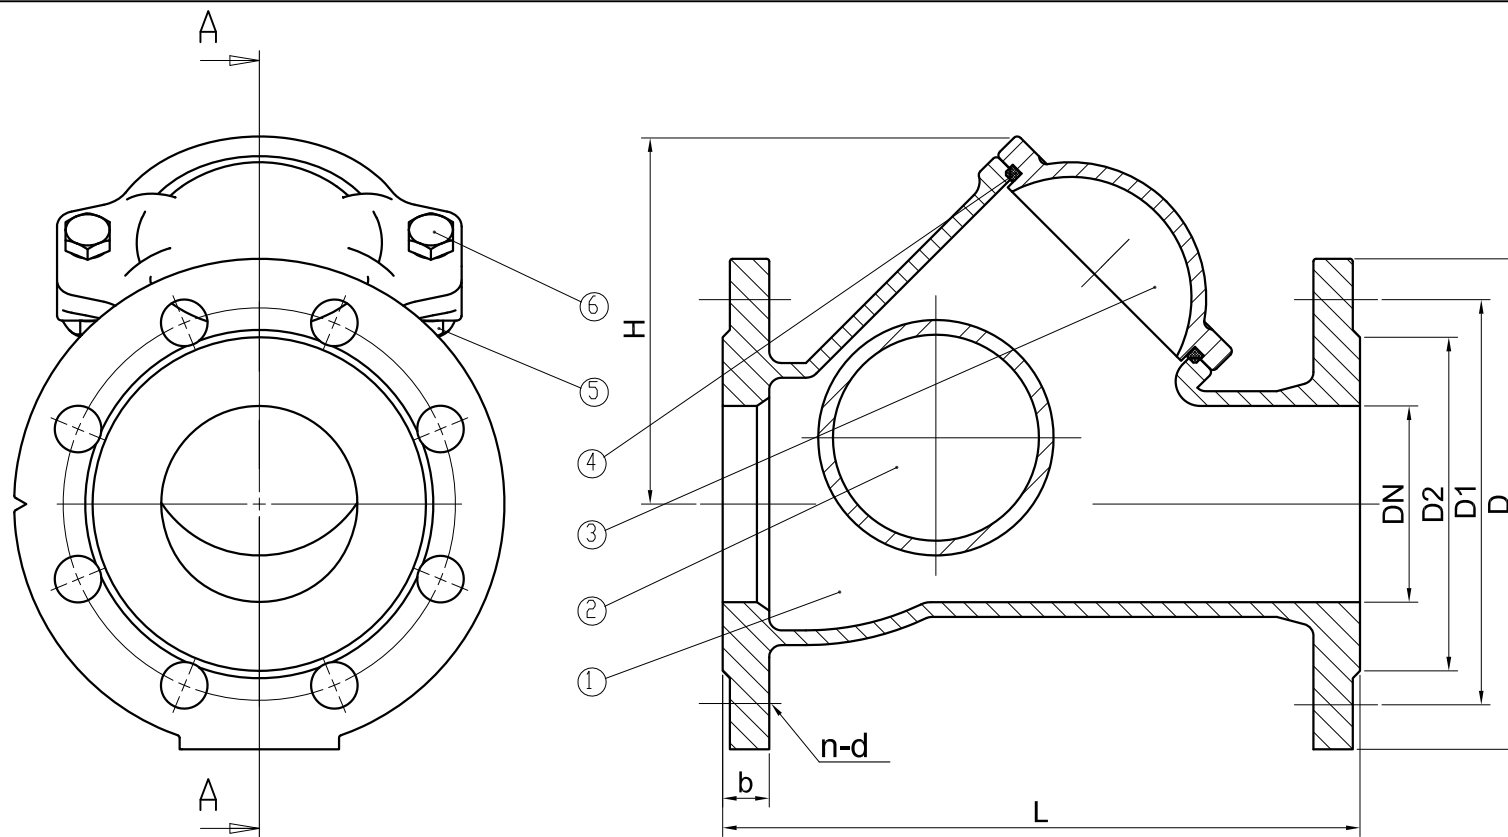

- 1.Face to Face according to EN558-1, basic series 48 & DIN3202 F6
- 2.Flange drilling according to EN1092-2 PN10/16

Size	L	D	EN1092-2 PN10			EN1092-2 PN16			b	H
			D1	D2	n-d	D1	D2	n-d		
40	180	150	110	84	4-19	110	84	4-19	19	90
50	200	165	125	99	4-19	125	99	4-19	19	100
65	240	185	145	118	4-19	145	118	4-19	19	125
80	260	200	160	132	8-19	160	132	8-19	19	136
100	300	220	180	156	8-19	180	156	8-19	19	185
125	350	250	210	184	8-19	210	184	8-19	19	196
150	400	285	240	211	8-23	240	211	8-23	19	265
200	500	340	295	266	8-23	295	266	12-23	20	340
250	600	405	350	319	12-23	355	319	12-28	22	420
300	700	460	400	370	12-23	410	370	12-28	24.5	480
350	800	520	460	429	16-23	470	429	16-28	26.5	617
400	900	580	515	480	16-28	525	480	16-31	28	680
500	1150	715	620	582	20-28	650	609	20-34	31.5	-

6	Nut	SS304		
5	Bolt	SS304		
4	Bonnet Gasket	EPDM		
3	Bonnet	DI GGG50		
2	Ball	Steel+EPDM		
1	Body	DI GGG50		
NO	Name	Material	Q'ty	Remark
DRN	Wang	WEIGHT	MATERIAL	
CHK		SCALE	Ball Check valve	
APP		DATE		
			CB100F	
			REV	20141104