


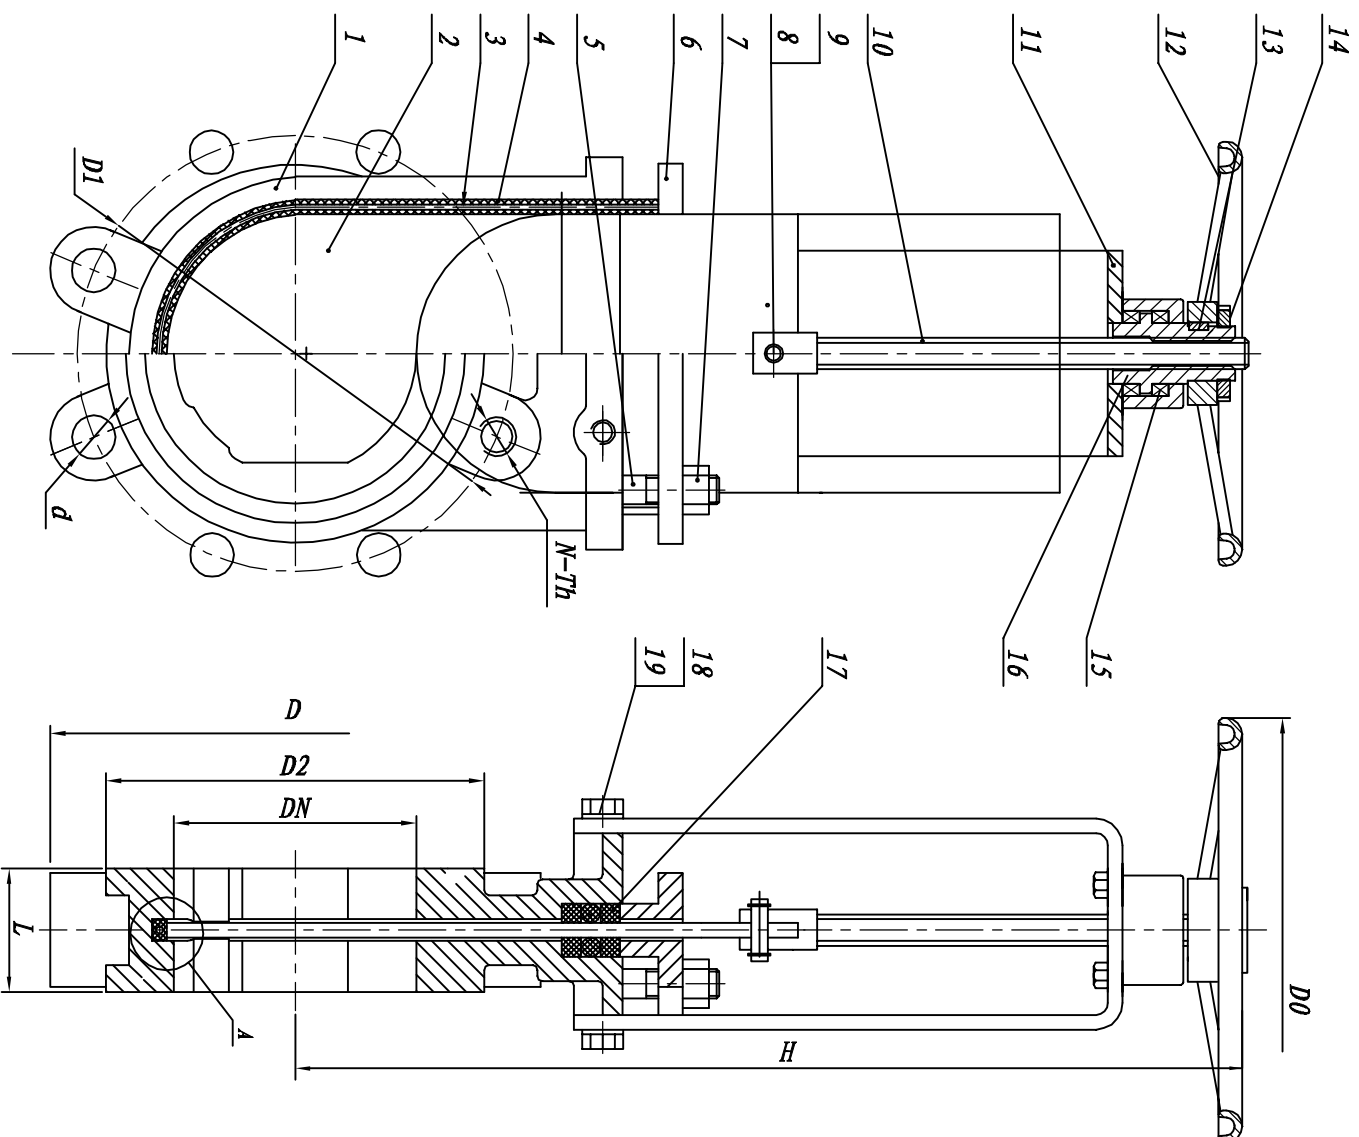

NO	NAME	MATERIAL
1	BODY	GGG40
2	DISC	201
3	SEAL	EPDM
4	STEEL WIRE	304
5	STANDARD PARTS	304
6	PACKING	WCB
7-9	STANDARD PARTS	304
10	STEM	304
11	SUPPORTING PLATE	A3
12	HANDWHEEL	MALLEABLE IRON
13	FLAT KEY	A3
14	NUT	A3
15	BEARING	ZCHS5b10-6
16	STEM NUT	BRASS
17	PACKING	PTFE+EPDM
18-19	STANDARD	304
20	COLLET	WCB

REMARK3、DESIGN: JB/T8691-1998
2、FLANGE: GB/T9113.1
3、FACE TO FACE: GB/T15188.2-94
4、TEST: GB/T13927

DN (mm)	L	D	D1	D2	D0	N-Th	d	HL
40	48	165	125	99	180	4-M16	018	300
50	48	165	125	99	180	4-M16	018	315
65	48	185	145	118	200	4-M16	018	345
80	51	200	160	132	220	8-M16	018	380
100	51	220	180	156	240	8-M16	018	400
125	57	250	210	184	260	8-M16	018	450
150	57	285	240	211	280	8-M20	023	515
200	70	340	295	266	300	12-M20	023	615
250	70	405	355	319	340	12-M24	027	720
300	76	460	410	370	380	12-M24	027	850
350	76	520	470	429	400	16-M24	027	930
400	89	580	525	480	450	16-M27	030	1010

KNIFE GATE VALVE	Rising stem
------------------	-------------

RUBBER SEAL PN16	
------------------	--

TIANJIN KEFA VALVE CO.,LTD