


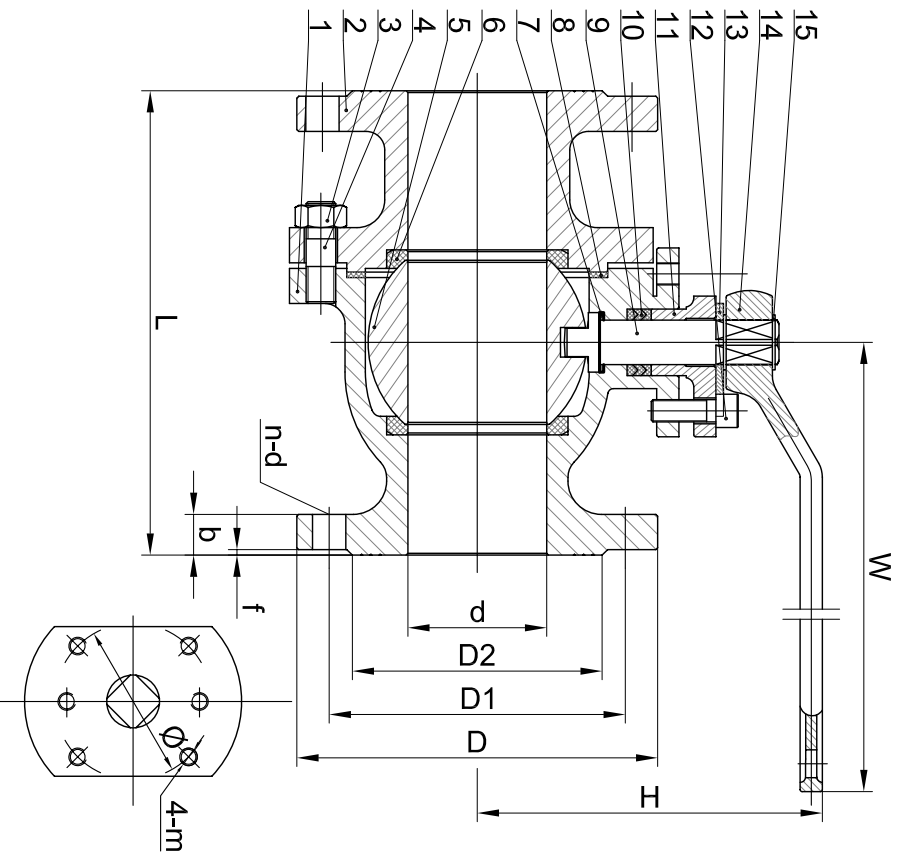

SIZE	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250
d	15	20	25	32	40	50	65	80	100	125	150	200	250
L	115	120	125	130	140	150	170	180	190	325	350	400	450
H	78	113	107	113	130	146	176	222	300	325	350		
W	130	160	160	160	250	250	350	350	400	600	600		
D2	45	58	68	78	88	102	122	138	158	188	212	268	320
D1	65	75	85	100	110	125	145	160	180	210	240	295	355
D	95	105	115	140	150	165	185	200	220	250	285	340	405
b	14	16	16	18	18	20	20	22	24	26	26	30	32
n-d	4-Ø14	4-Ø14	4-Ø14	4-Ø18	4-Ø18	4-Ø18	4-Ø18	8-Ø18	8-Ø18	8-Ø18	8-Ø23	12-Ø23	12-Ø27
f	2	2	2	2	3	3	3	3	3	3	3	3	3
Ø	42	42	42	42	50	50	70	102	102	125	140	165	165
4-m	M5	M5	M5	M6	M6	M8	M10	M10	M10	M12	M16	Ø20	Ø20

1. Design and Manufacture : DIN3357
2. Face to Face : DIN3202
DN15 ~ DN100(F4)
DN125 ~ DN250(F5)
3. End Flange Dimensions : DIN2533
4. Nominal Pressure : 1.6 Mpa
5. Pressure test : DIN3230

NO.	Part Name	Material
1	Body	Gray cast iron (GG25 RAL5017)
2	Bonnet	Gray cast iron (GG25)
3	Nut	Carbon steel
4	Bolting	Carbon steel
5	Ball	Stainless steel (SS304)
6	Seat	PTFE
7	Washer	PTFE
8	Gasket	PTFE
9	Stem	Stainless steel (SS304)
10	Stem Packing	PTFE
11	Gland flange	Gray cast iron (GG25)
12	Gland bolt	Carbon steel
13	Stop collar	Carbon steel
14	Lever	Ductile iron (GGG40)
15	Circclip	Carbon steel

DRN	Tian	WEIGHT	MATERIAL
CHK		SCALE	
APP		DATE	11/16/07

Q9000-1

REV